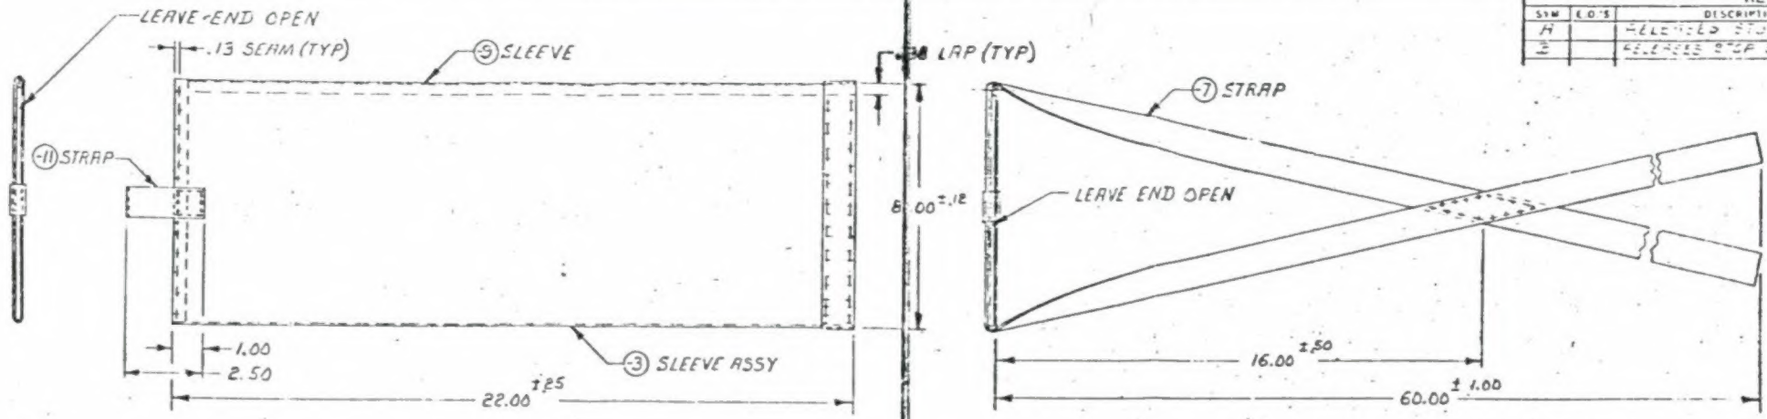

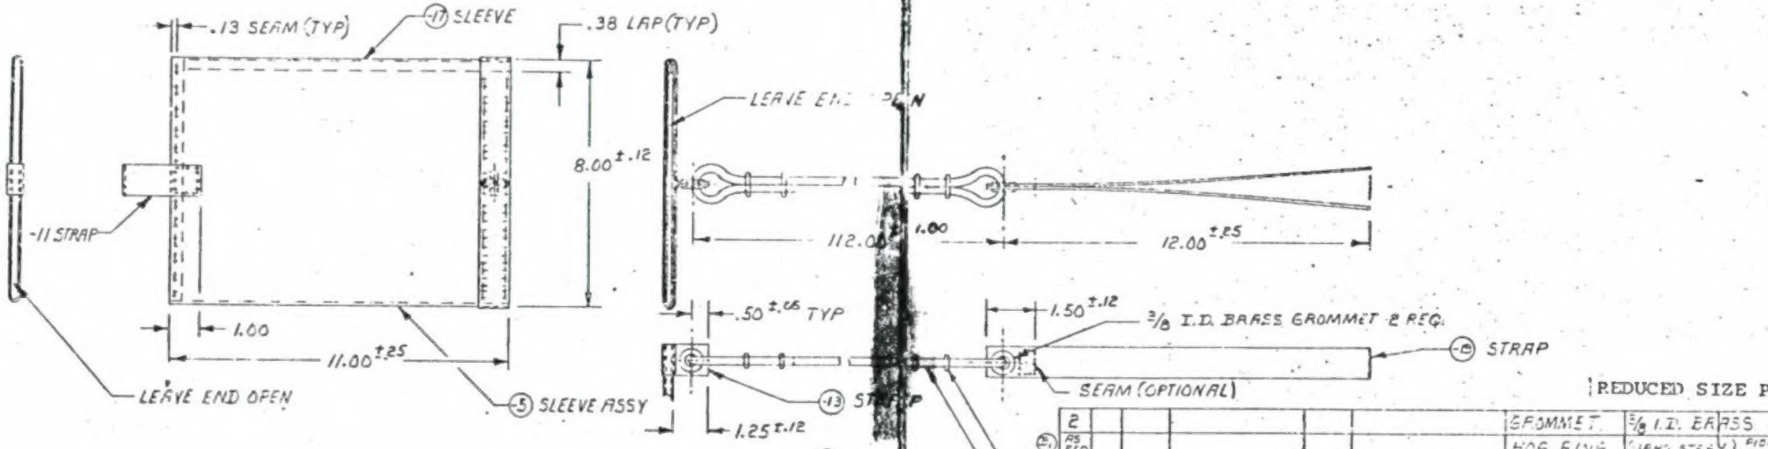

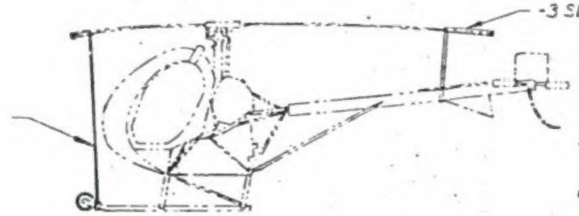

TYPICAL TIE DOWN INSTALLATION

NOTES: UNLESS OTHERWISE SPECIFIED

1. MAY BE PURCHASED FROM TUBBS GREAT WESTERN LOS ANGELES, CAL.
2. SUPERSEDES PART NO. 269A9288 PARTS ARE INTERCHANGEABLE
3. DIRECTION OF STRIPES ON -5 & -17 SLEEVES OPTIONAL.

REVISIONS

SYM	E.O.'S	DESCRIPTION	DRWN	APP'D	DAT
A		RELEASED PER LETTER 1			
B		RELEASED PER LETTER 13			

REDUCED SIZE PRINT

269A9288

REQD	PART NO.	REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
2				GROMMET		3/8 I.D. BRASS COMM.	KIT
AS REQ				HOG RING		(UPHOLSTERY) PIONEER PRODUCTS 1401 S. LOS ANGELES ST. L.A. CAL.	
1			-19	STRAP - 1/16 THICK x 1.00 WIDE - WEBBING - RED		COMM.	
1			-17	SLEEVE - 10 OZ. DUCK CANVAS WITH 1" WIDE RED STRIPES		COMM.	
1			-15	LINE - 1/4 O.D. POLYETHYLENE MONO-FILAMENT		CORD	
1			-13	STRAP - 1/16 THICK x 1.00 WIDE - WEBBING - RED		COMM.	
1	1		-11	STRAP - 1/16 THICK x 1.00 WIDE - WEBBING - RED		COMM.	
	1		-9	SLEEVE - 10 OZ. DUCK CANVAS WITH 1" WIDE RED STRIPES		COMM.	
	1		-7	STRAP - 1/16 THICK x 1.00 WIDE - WEBBING - RED		COMM.	
		2	-5	SLEEVE ASSY			
		1	-3	SLEEVE ASSY			
-5	-5						
NO REQ							

ASSEMBLY USED ON — ASSEMBLY SPECIFIED — LIST OF MATERIAL

NEXT ASSY APPLICATION	USED ON	NEXT ASSY QTY REQD	FINAL ASSY QTY REQD

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCES
3 PLACE DECIMAL ± .010
2 PLACE DECIMAL ± .03
ANGULAR ± 0° 30'
DIMENSIONS TO BE MET BEFORE PLATING.
CORNER RADIUS .02 ON 0° BEVELS AND SPOT FACES OF .125 DIA. OR LESS — .093 RADIUS ON GREATER THAN .125 DIA.

DRWN
CHK'D
APP'D
APP'D
APP'D
APP'D
APP'D

TIE DOWN ASSY
MAIN ROTOR
BLADE

SCALE 1/2

HUGHES TOOL COMPANY
AIRCRAFT DIVISION
CULVER CITY, CALIFORNIA

269A9288

CODE 02731 SHEET 1 OF

SHOP COPY